

# EVERRUN 1200 by Polarprod, Sweden

## ER-1200

**Välj mellan Standard ( jord/ grus) alt planerings skopa,**  
Hydraulisk konverter Transmission, Euro III Engine, Trima Quick Hitch,  
Flytläge & Parallellföring på lastaren, 130W Värmare, 220V motorvärmare, Rops & Fops hytt, Tippbar hytt,  
Backkamera, Justerbar stol, Justerbar ratt, Trumbromsar, Lås för lyft och styrcylinder, Hydrauliskt tryck  
kontroll System, Värmepaket på höger utsida med inspektionsslucka ”

Däck 20,5/70-16

**inkl standardskopa alt planeringsskopa**



## Tillval

( Tillval till Standardmaskinen vid beställning )

20.5/70-16 "breda däck"	Ingår i priset
3-4:de funktion, Trima Trima Quick Hitch	INGÅR SOM STANDARD PÅ SAMTLIGA MASKINER
Elväxel på joystick	10000 SEK
Lastar-dämpare	4500 SEK
LED Light	2000 SEK
Vinterdäck <b>16/55-17</b>	8900 SEK Måste anges vid beställning


Moms tillkommer på samtliga priser

## Exempel på tillbehör

Mekaniska pallgafflar 120 cm 2,5 ton	5900 SEK	European Grapple Forks	15900 SEK
Hydrauliska pallgafflar 120 cm 2,5 ton	9900 SEK	Grapple Bucket	13900 SEK
Hydrauliskt Snöblad / V-blad 250cm	19900 SEK	Wooden Forks	13470 SEK
Snow Bucket hyd-Wings	19900 SEK	4 in 1 Bucket	13780 SEK
Sandspridare, med hydrauliskt frontmontage	19440 SEK	Mixer Bucket	14900 SEK
Sopaggregat med uppsamlare	18900 SEK		

Moms tillkommer på samtliga ovan priser

( Alla hydraulanslutningar är i mm )

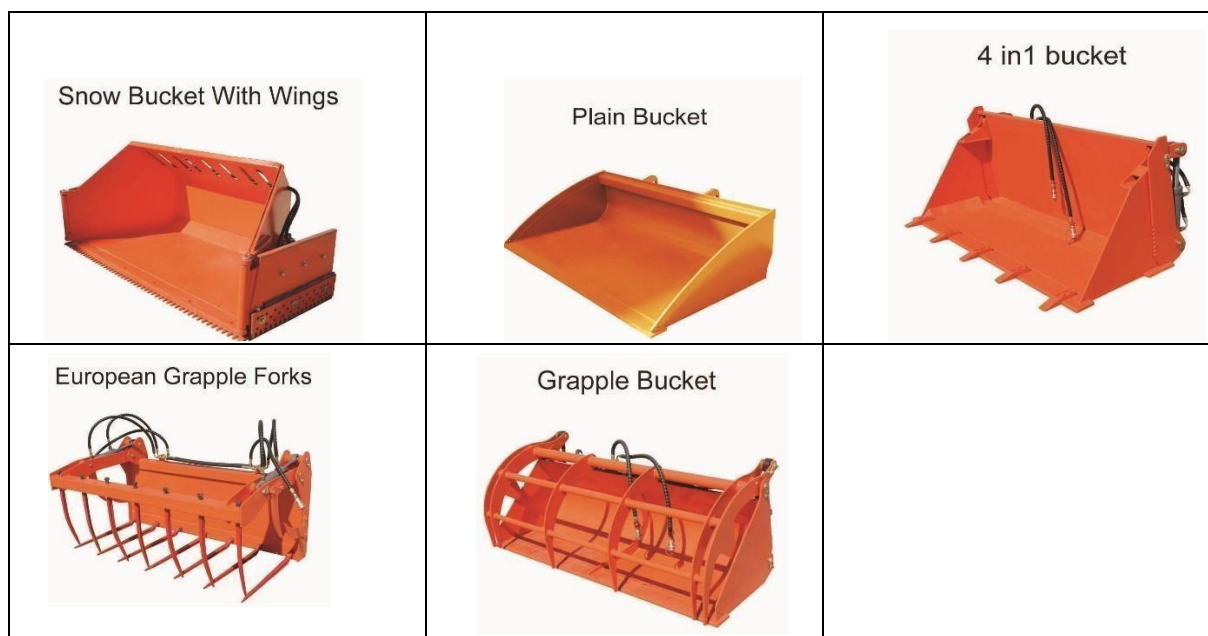

## Specifikationer: ER-1200

<b>1.0 Engine Details</b>	
<b>(1) Model Motor:</b>	C490BPG Engine(EuroIII Engine)
<b>(2) Engine Type:</b>	In-line Arrangement, Water-cooled, Four-cycle Diesel Engine
<b>(3) Rated Power:</b>	36.8 KW
<b>(4) Rated Speed:</b>	2650 r/min(rpm)
<b>(4) Fuel Consumption Ration in Standard Working Condition:</b> 252 g/kw.H	
<b>2.0 Transmission System</b>	
<b>(1) Type:</b>	Fixed-spindle Power Shift
<b>(2) Shift Gear Control Oil Pressure</b>	1.0-1.8MPa
<b>(3) Rated Input Speed:</b>	2500(rpm)
<b>3.0 Bucket (Standardskopa Jord / Grus)</b>	
<b>(1) Bucket Capacity:</b>	0.53 m3

<b>(2) Bucket Width:</b>	1740mm
<b>(3) Bucket Type:</b>	Heavy-duty Bolt on Teeth
<b>(5) Rated Load:</b>	1200kg
<b>(6) Operating Weight</b>	3400kg
<b>4.0 Overall Dimensions</b>	
<b>(1) Overall Length(bucket on ground)</b>	5200mm
<b>(2) Overall Height</b>	

**7.0 Tyre**

20.5/70-16

**(2) Min. Turning Radius:**

5200mm

**(3) Driving System:**

Hydraulic Converter

**6.0 Brake System****(1) Service Brake**

Four Wheel Hydraulic Spread-shoed Brake

**(2) Parking Brake**

Hand Operated

**(3) Ground to Cab Top:**

2550mm

**(4) Dumping Height:**

2450mm

**(5) Min. Base to the Ground**

240mm

**(6) Overall Width**

1740mm

**5.0 Operating Specifications****(1) Steering System:**

Articulated Frame with Hydraulic Power Steering



POLARPROD AB Hamngatan 30 83540 Bergkvara ( Kalmar ) polarprod@gmail.com