

# EVERRUN 800 by Polarprod, Sweden

## Everrun 800

### Välj mellan Standard ( jord/ grus) alt planerings skopa

Konverter, Flyt funktion & Parallell föring på lastaren, Joystick mekanisk, 3&4e funktion, Trima Quick Hitch på lastaren, 130W Heater, 220V motor värmare, Rops & Fops Hytt, Fällbarhytt, Backkamera, Hydrauliskt tryck kontroll System, Värmepaket på högerdörr utsida med inspektionsslucka.

**Däck 31\*15.5-15, 35 mm**

i standard utförande inkl standardskopa alt planeringskopa



### Tillval


( Tillval till Standardmaskinen vid beställning )


Däck 31*15.5-15, 35 mm	Ingår i priset
3-4:de funktion, Trima Trima Quick Hitch	INGÅR SOM STANDARD PÅ SAMTLIGA MASKINER
Elväxel på joystick	10000 SEK
Lastar-dämpare	4500 SEK

LED Light	2000 SEK
Vinterdäck <b>16/55-17</b>	8900 SEK Måste anges vid beställning
Moms tillkommer på samtliga priser	

## Exempel på tillbehör

Mekaniska pallgafflar 120 cm 2,5 ton	5900 SEK	European Grapple Forks	13900 SEK
Hydrauliska pallgafflar 120 cm 2,5 ton	9900 SEK	Grapple Bucket	13900 SEK
Hydrauliskt Snöblad / V-blad ( 2m )	15900 SEK	Wooden Forks	13470 SEK
Snow Bucket hyd-Wings	16900 SEK	4 in 1 Bucket	12780 SEK
Sandspridare, med hydrauliskt frontmontage	17440 SEK	Mixer Bucket	16900 SEK
Sopaggregat med uppsamlare	17900 SEK		
Moms tillkommer på samtliga ovan priser			
( Alla hydraulanslutningar är i mm )			

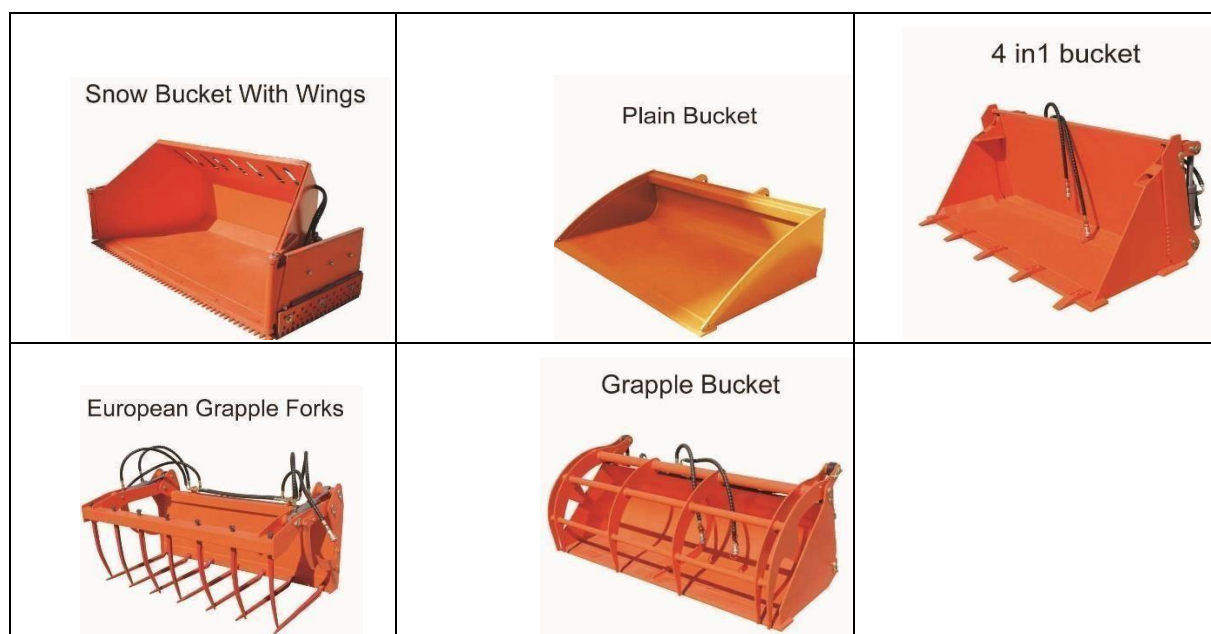



## Specifikationer: ER-800

### 1.0 Engine Details

<b>(1) Model:</b>	ZN390Q
<b>(2) Engine Type:</b>	In-line Arrangement, Water-cooled, Three-cycle Diesel Engine
<b>(3) Rated Power:</b>	25 KW
<b>(4) Rated Speed:</b>	2500 r/min(rpm)
<b>(4) Fuel Consumption Ration in Standard Working Condition:</b>	252 g/kw.H

### 2.0 Transmission System

<b>(1) Type:</b>	Fixed-spindle Power Shift
<b>(2) Shift Gear Control Oil Pressure</b>	1.0-1.8MPa
<b>(3) Rated Input Speed:</b>	2500(rpm)

### 3.0 Bucket

<b>(1) Bucket Capacity:</b>	0.48 m <sup>3</sup>
-----------------------------	---------------------

<b>(2) Bucket Width:</b>	1600mm
<b>(3) Bucket Type:</b>	Heavy-duty Bolt on Teeth
<b>(5) Rated Load:</b>	800kg
<b>(6) Operating Weight</b>	2700kg
<b>4.0 Overall Dimensions</b>	
<b>(1) Overall Length(bucket on ground)</b>	4620mm
<b>(2) Overall Height</b>	
<b>(3) Ground to Cab Top:</b>	2540mm
<b>(4) Dumping Height:</b>	2120mm
<b>(5) Min. Base to the Ground</b>	220mm
<b>(6) Overall Width</b>	1500mm
<b>5.0 Operating Specifications</b>	
<b>(1) Steering System:</b>	Articulated Frame with Hydraulic Power Steering
<b>(2) Min. Turning Radius:</b>	5200mm
<b>(3) Driving System:</b>	Hydraulic Converter
<b>6.0 Brake System</b>	
<b>(1) Service Brake</b>	Four Wheel Hydraulic Spread-shoed Brake
<b>(2) Parking Brake</b>	Hand Operated

**7.0 Tyre**

31\*15.5-15

**Polarprod AB**  
Hamngatan 30  
38540 Bergkvara  
0640 42002 polarprod@gmail.com